


- THD 10%
-
- 0-10V
- : 4kV 6kV
-
- Class I
-
- &
- IP67
- 5

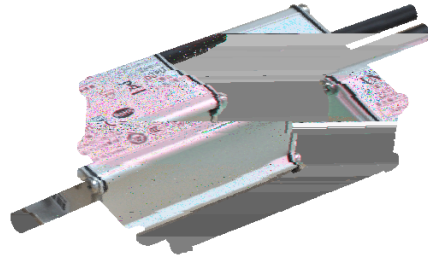

EUC-040SxxxDVM000x

40W IP67

90-305Vac

	1			2			
					120Vac	220Vac	

1 120-240Vac 127-250Vdc
 2 220 Vac 100%


				100% 120Vac
				100% 220Vac
(I ² t)				220Vac 25°C 10%Ipk-10%Ipk = 36 μs

				100%
/				100%
			±	100%
			±	
		°		°


Cree XLamp XP-G


25°C

降额曲线

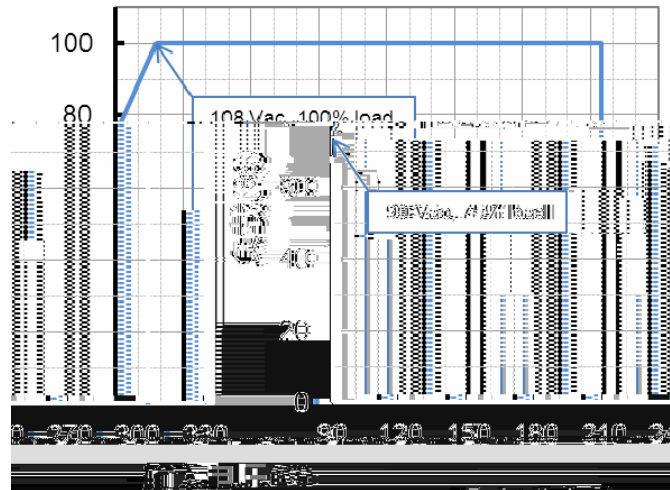


寿命 vs. 壳温

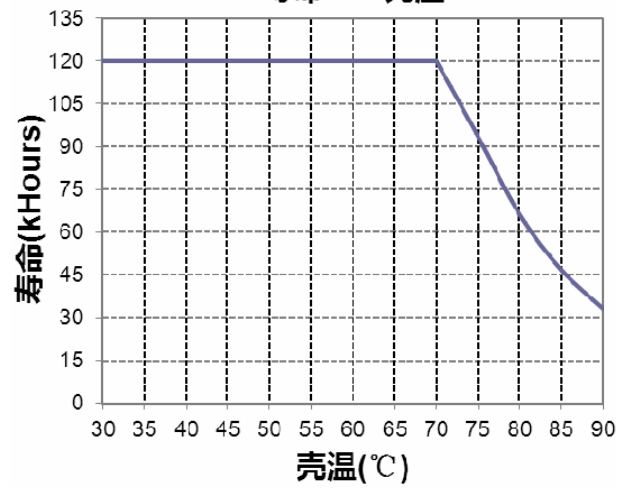

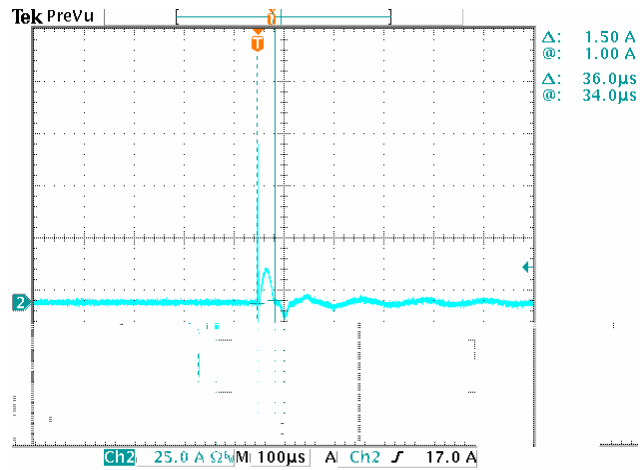


EUC-040S070DVM($I_o=700\text{mA}$)

效率 vs. 输出电压

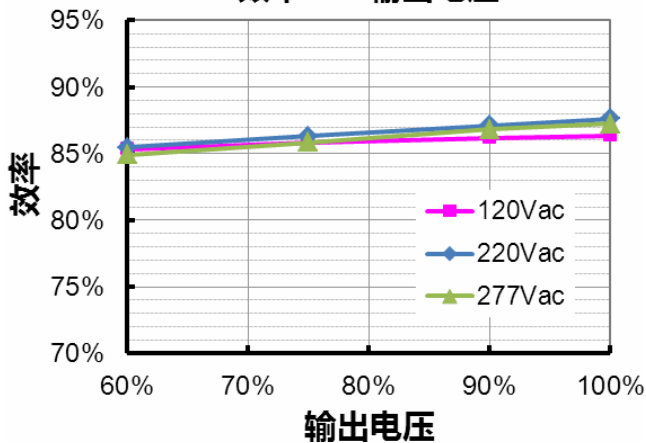


EUC-040S070DVM0004($I_o=500\text{mA}$)

效率 vs. 输出电压

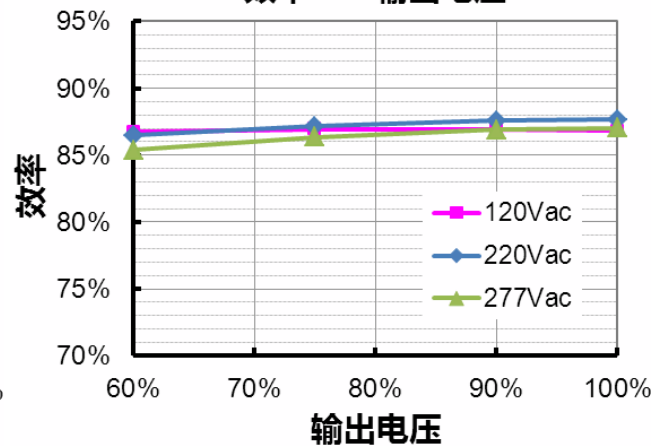


EUC-040S105DVM($I_o=1050\text{mA}$)



效率 vs. 输出电压

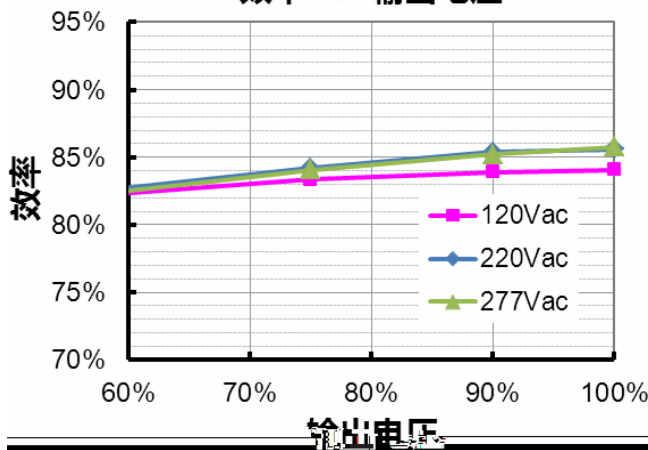

EUC-040S105DVM0004($I_o=860\text{mA}$)


效率 vs. 输出电压

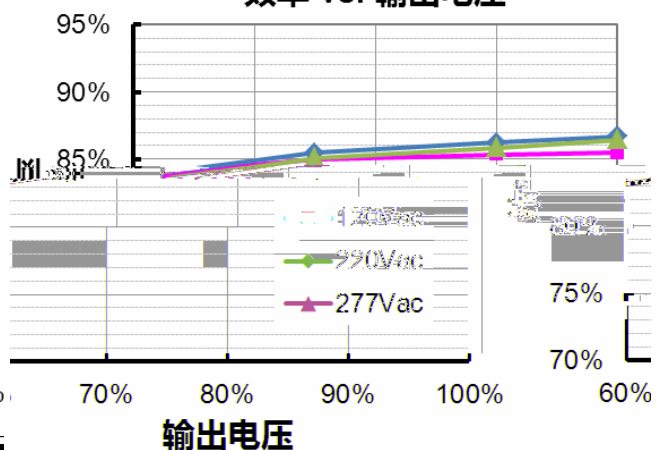

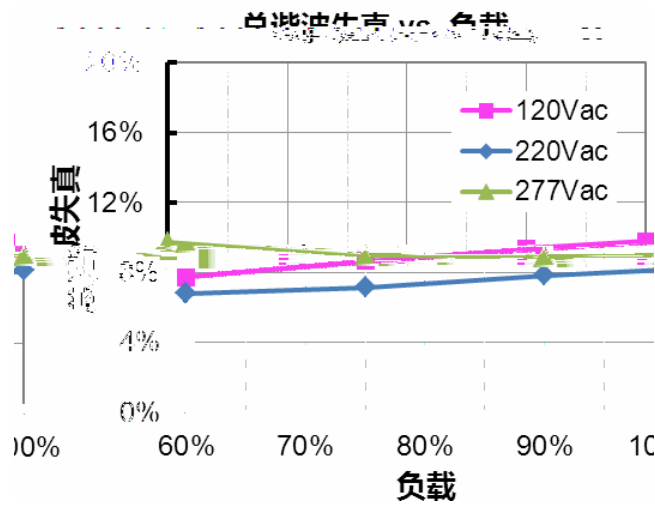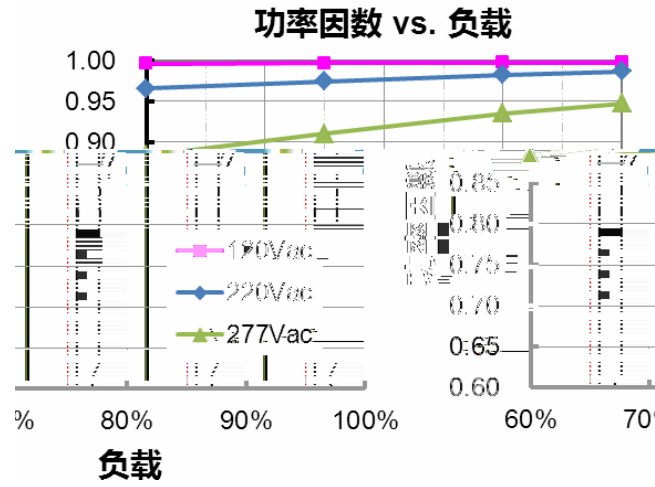


			±	±


0-10V

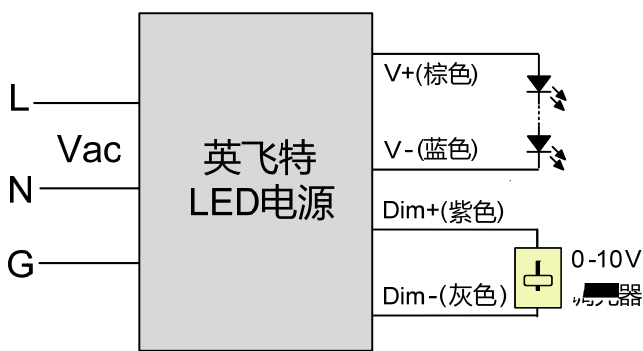

Io/Iomax vs. 调光电压

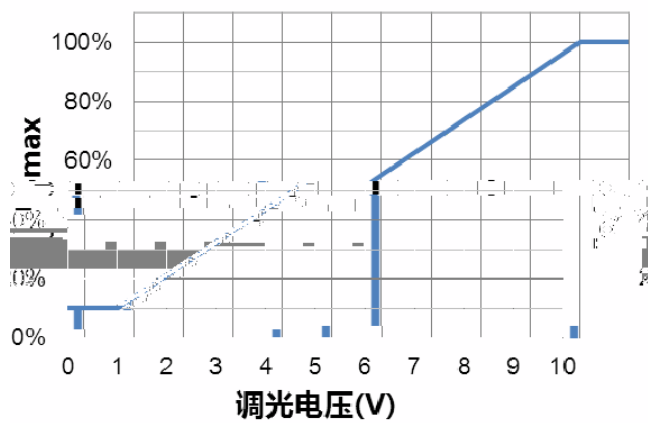

3. Dim+

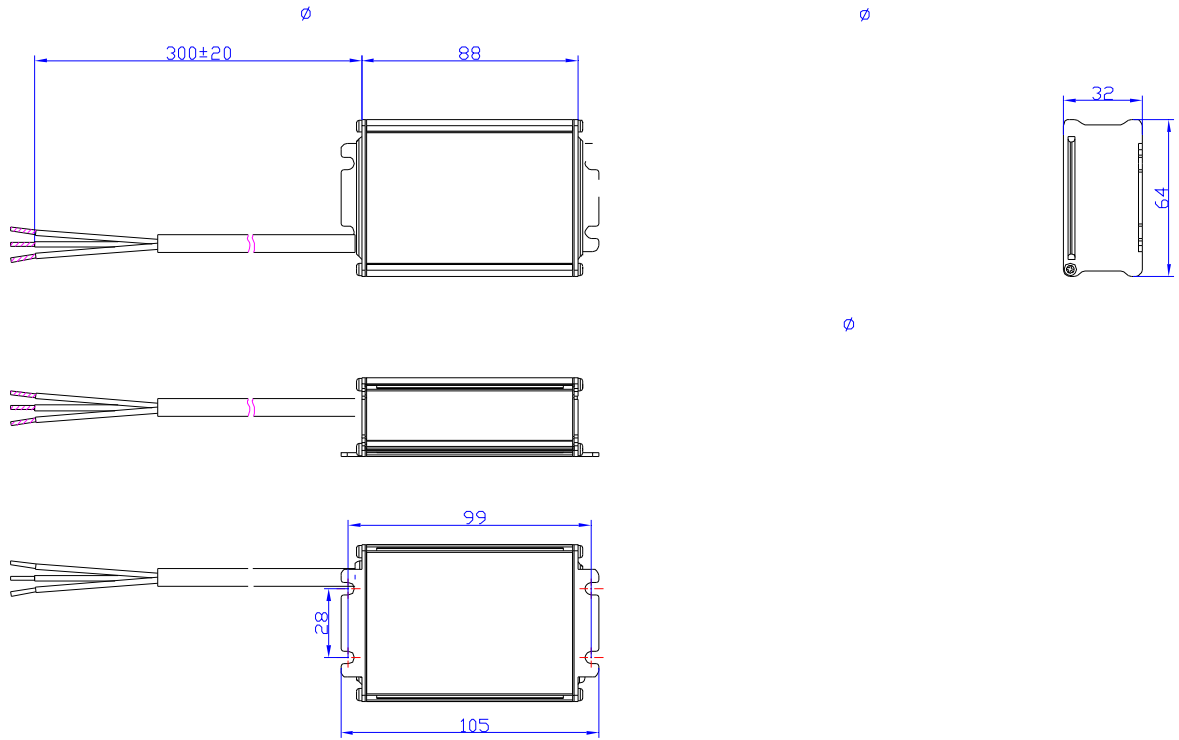

			/	/
			/	
		(Vac)		
		- 0- 10V		
			/	
		- 0-10V - 1 DC	/	
		- 0-10V - 2	/	
			/	
			/	
		- - CCC	/	