



xxSV

200W IP67

176-305Vac

190-250 Vd	0-8.4 A	200 W
------------	---------	-------

0.96	EBV-200S036SV
0.96	EBV-200S048SV

200-240Vac 190-250Vdc

" "

190-250 Vdc

	-	-	0.70 mA	IEC60598-1; 240Vac/60Hz
	-	-	1.1 A	220Vac 100%
I ² t	-	-	2.22 A ² s	220Vac 25 10%I _{pk} -10%I _{pk} = 808 μs
	0.9	-	-	220-240Vac, 50-60Hz, 60%-100% (120-200W)
	-	-	20%	
	-	-	10%	220-240Vac, 50-60Hz, 75%-100% (150-200W)

		A
--	--	----------

	-	437,000 Hours	-	220 Vac 25 80% (MIL-HDBK-217F)
	-	106,000 Hours	-	220 Vac 80% 70
	-40°C	-	+90°C	
	-40°C	-	+75°C	5 10% RH to 100% RH
	-40°C	-	+85°C	5%RH to 100%RH
(L x W x H)	6.65 x 2.66 x 1.56			7.48 x 2.66 x 1.56
(L x W x H)	169 x 67.5 x 39.7			190 x 67.5 x 39.7
	-	900 g	-	

25°C


CE & ENEC	EN 61347-1, EN61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
CCC	19510.1, GB 19510.14
BIS	IS 15885(PART2/SEC13)





EMS	
EN 61000-4-6/KN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8/KN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11/KN 61000-4-11	Voltage Dips
EN 61547/KN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment


1 EMI

() EMI

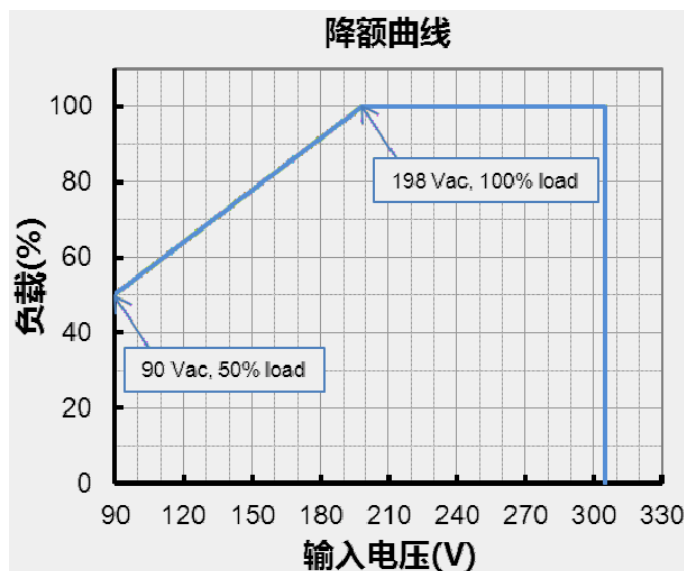

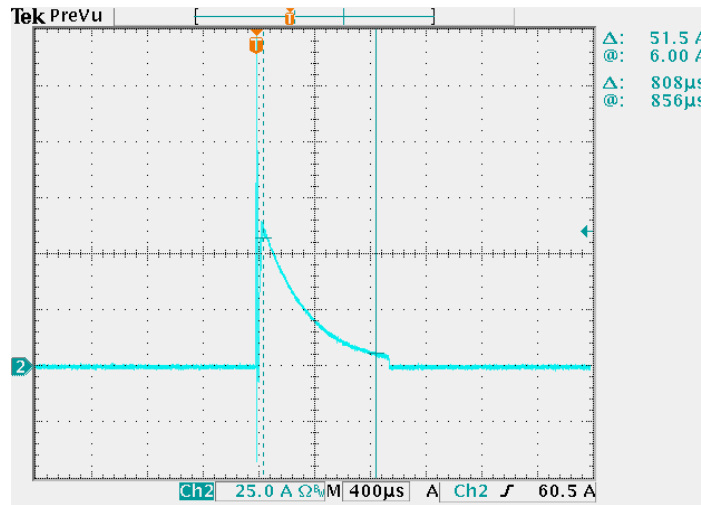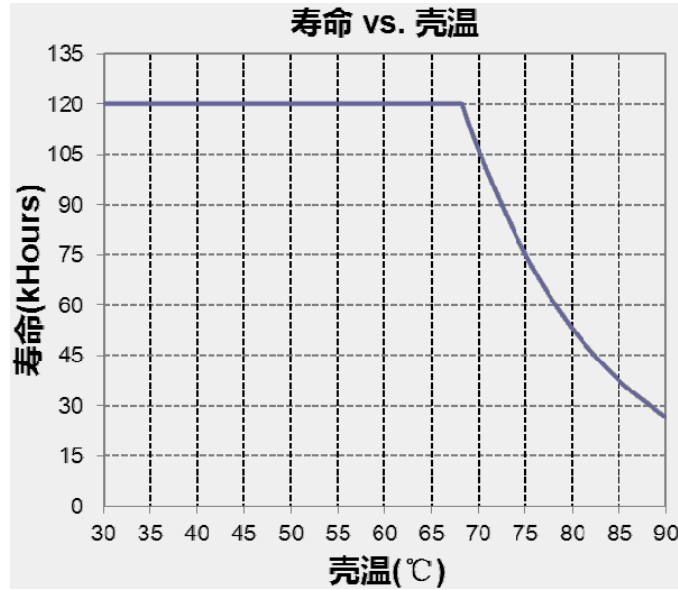


EBV-200S012SV

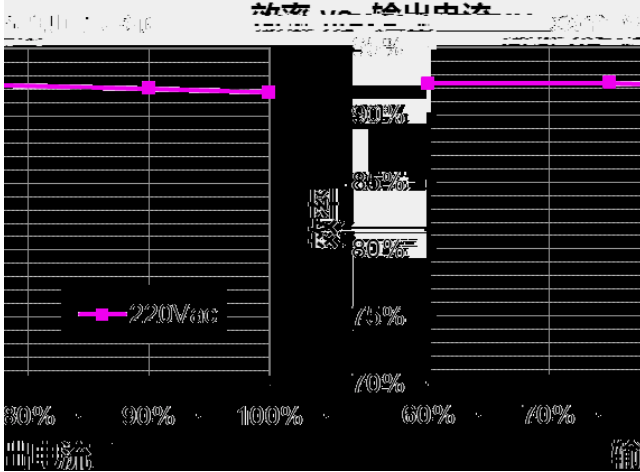


EBV-200S024SV

效率 vs. 输出电流

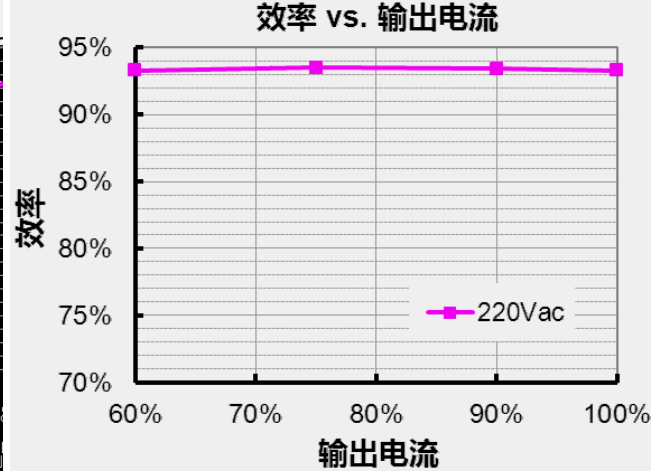

EBV-200S036SV


效率 vs. 输出电流

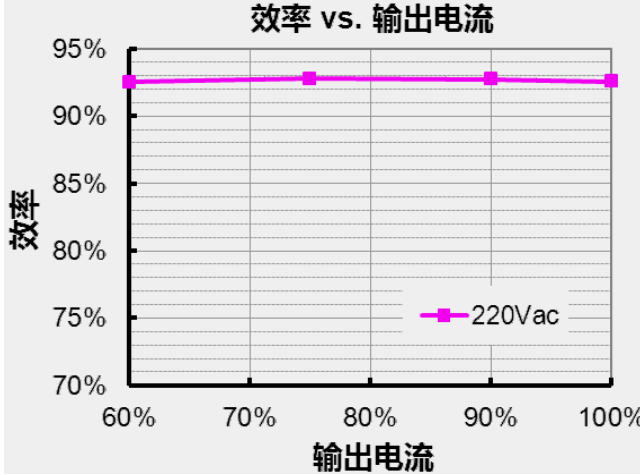


EBV-200S048SV




功率因数 vs. 负载

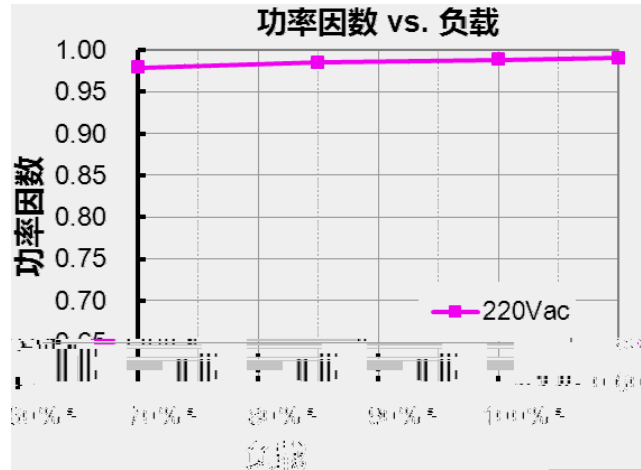


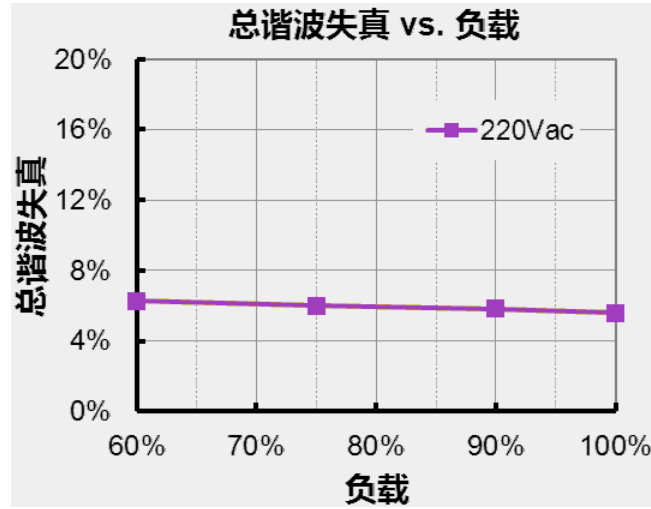

EBV-200S012SV

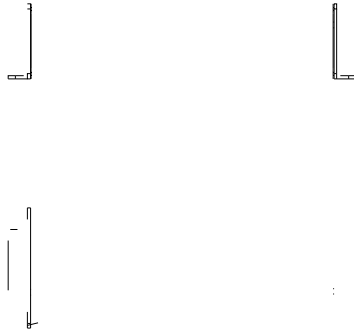

EBV-200S024SV

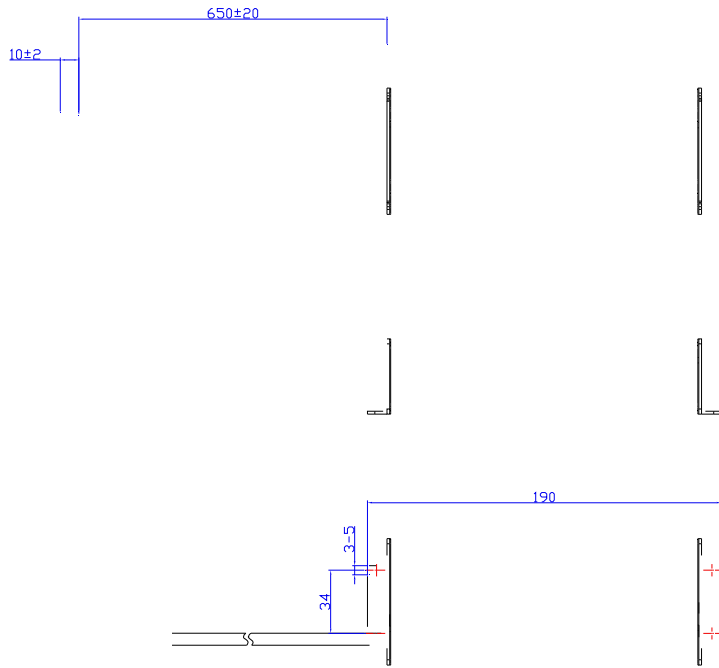

PROJ: © L

Unspecified tolerance: ± 1

RoHS

2011/65/EU

2018-12-14	A	/	/	
2019-01-25	B	/		
		KCC	/	
			1 CCC 220/230/240Vac; CCC 200-240Vac 190-250Vdc BIS KS	1 CCC 220/230/240Vac; CCC 200-240Vac 190-250Vdc BIS KCC KS
		(L x W x H)	6.50 x 2.66 x 1.56	6.65 x 2.66 x 1.56
		(L x W x H)	165 x 67.5 x 39.7	169 x 67.5 x 39.7
		/		